


PLAN VIEW

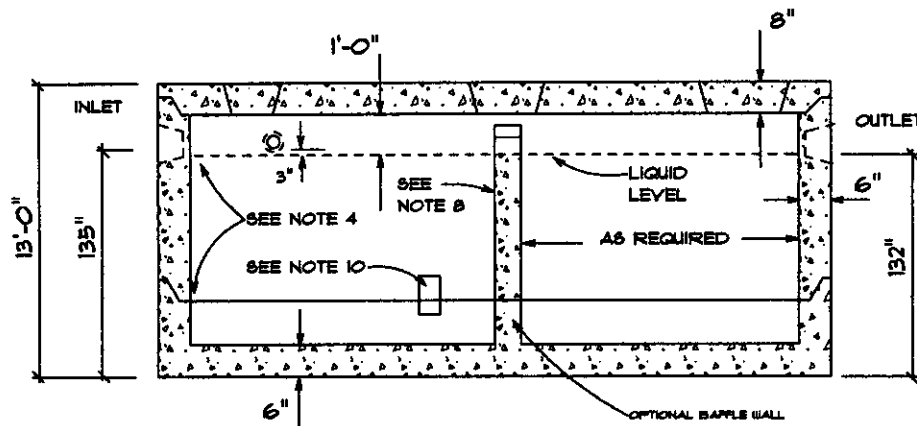

SECTION VIEW

10,500 GALLON SEPTIC TANK H-20

SPECIFICATIONS:

1. TOP 8" THICK & DESIGNED FOR H-20 LOADING
2. BOTTOM 6" THICK AND DESIGNED FOR H-20 LOADING
3. WALL 6" THICK AND DESIGNED FOR H-20 LOADING
4. TONGUE AND GROOVE JOINTS SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F_c 5000 PSI @ 28 DAYS
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER
7. APPROXIMATE WEIGHT 80,000 LBS.
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5 FT.
10. SPANNERS ARE USED IN RISER SECTIONS FOR ADDED SUPPORT.
11. INLET HEIGHT MAY VARY DUE TO BUTYL RESIN THICKNESS.
12. INLET & OUTLET PIPE SIZE AS REQUIRED AND RUBBER BOOTED

WACHUSETT PRECAST, INC.

14 PRATT'S JCT. RD.
P.O. BOX 901
STERLING, MA. 01564
1-800-244-7544

PHONE: 978-422-3311
FAX: 978-422-9818
EMAIL: WPRECAST@AOL.COM
WEB: WACHUSETTPRECAST.COM

10,500 GALLON SEPTIC TANK H-20

NOT TO SCALE