


PLAN VIEW

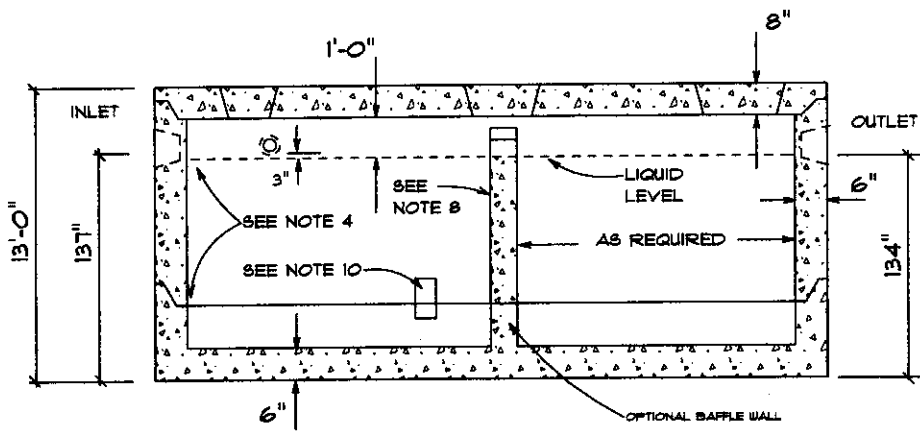

SECTION VIEW

## 11000 GALLON SEPTIC TANK H-20

**SPECIFICATIONS:**

1. TOP 8" THICK & DESIGNED FOR H-20 LOADING
2. BOTTOM 6" THICK AND DESIGNED FOR H-20 LOADING
3. WALL 6" THICK AND DESIGNED FOR H-20 LOADING
4. TONGUE AND GROOVE JOINTS SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F<sub>c</sub> 5000 P81 • 28 DAYS
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER
7. APPROXIMATE WEIGHT 80,000 LBS.
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5 FT.
10. SPANNERS ARE USED IN RISER SECTIONS FOR ADDED SUPPORT.
11. INLET HEIGHT MAY VARY DUE TO BUTYL RESIN THICKNESS.
12. INLET & OUTLET PIPE SIZE AS REQUIRED AND RUBBER BOOTED

<b>WACHUSETT PRECAST, INC.</b>	
74 PRATTS JCT. RD. P.O. BOX 901 STERLING, MA. 01564 1-800-244-7544	PHONE: 978-422-3311 FAX: 978-422-8818 EMAIL: WPRECAST@AOL.COM WEB: WACHUSETTPRECAST.COM

11,000 GALLON SEPTIC TANK H-20

NOT TO SCALE