


PLAN VIEW

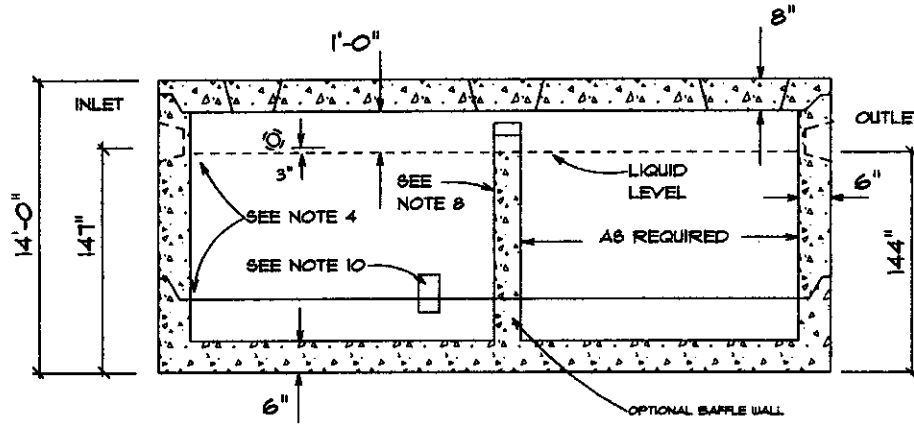

SECTION VIEW

11,500 GALLON SEPTIC TANK H-20

SPECIFICATIONS:

1. TOP 8" THICK & DESIGNED FOR H-20 LOADING
2. BOTTOM 6" THICK AND DESIGNED FOR H-20 LOADING
3. WALL 6" THICK AND DESIGNED FOR H-20 LOADING
4. TONGUE AND GROOVE JOINTS SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F'c 5000 PSI @ 28 DAYS
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER
7. APPROXIMATE WEIGHT 80,000 LBS.
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5 FT.
10. SPANNERS ARE USED IN RIBBER SECTIONS FOR ADDED SUPPORT.
11. INLET HEIGHT MAY VARY DUE TO BUTYL RESIN THICKNESS.
12. INLET & OUTLET PIPE SIZE AS REQUIRED AND RUBBER BOOTED

WACHUSETT PRECAST, INC.

14 PRATTS JCT. RD.
P.O. BOX 901
STERLING, MA. 01564
1-800-244-7544

PHONE: 978-422-3311
FAX: 978-422-8818
EMAIL: WPRECAST@AOL.COM
WEB: WACHUSETTPRECAST.COM

11,500 GALLON SEPTIC TANK H-20

NOT TO SCALE