


PLAN VIEW

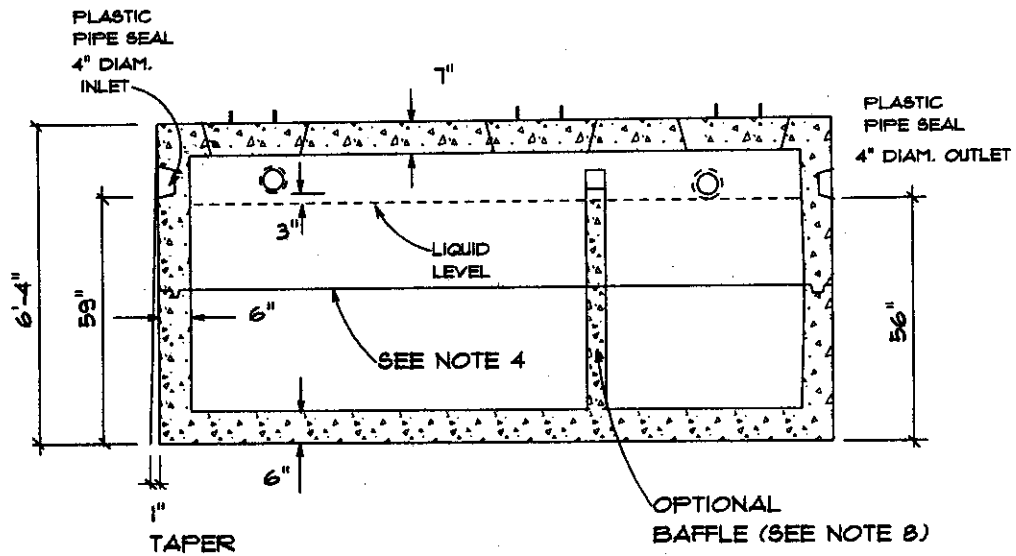

SECTION VIEW

NOTES:

1. TOP THICKNESS 7" WITH #4 REBAR @ 6" O.C. BOTH WAYS
2. BOTTOM THICKNESS 6" WITH #4 REBAR @ 6" O.C. BOTH WAYS
3. WALL THICKNESS 6" WITH 6"X6" NO. 10 WELDED WIRE MESH
4. TONGUE AND GROOVE JOINT SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F_c 5000 P81 MINIMUM AFTER 28 DAYS.
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER.
7. APPROXIMATE BAFFLE WEIGHT 24,000 LBS
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS.
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5'-0".

WACHUSETT PRECAST, INC.

74 PRATTS JCT. RD.
P.O. BOX 901
STERLING, MA. 01564
1-800-244-1544

PHONE: 978-422-3311
FAX: 978-422-8818
EMAIL: WFPRECAST@AOL.COM
WEB: WACHUSETTPRECAST.COM

1500 GALLON SEPTIC TANK H-20

NOT TO SCALE