


PLAN VIEW

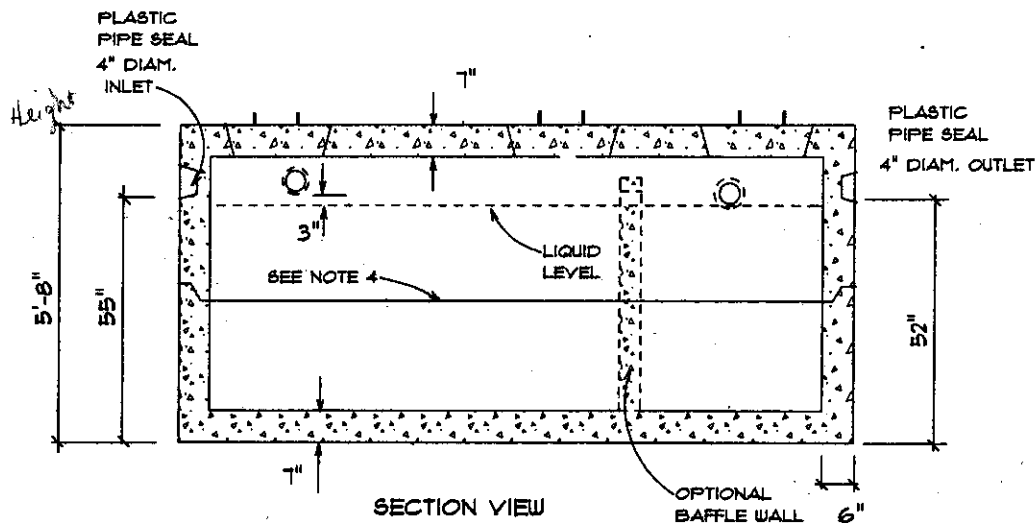

SECTION VIEW

2000 GALLON SEPTIC TANK H-20 SHALLOW

NOTES:

1. TOP THICKNESS 7" REINF. WITH #4 REBAR @ 6" O.C. BOTH WAYS
2. BOTTOM THICKNESS 6" REINF. WITH #4 REBAR @ 6" O.C. BOTH WAYS
3. WALL THICKNESS 6" REINF. WITH 6X6 NO. 10 WELDED WIRE MESH
4. TONGUE AND GROOVE JOINT SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F_c 4000 PSI @ 28 DAYS.
6. ALL REBAR ASTM A615 GRADE 60. 1" MIN. COVER.
7. APPROXIMATE WEIGHT 35,000 LBS
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS.
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5'-0"
10. LIQUID LEVEL IS 45"

WACHUSETT PRECAST, INC.

14 PRATTS JCT. RD.
P.O. BOX 301
STERLING, MA. 01564
1-800-244-7544

PHONE: 978-422-3311
FAX: 978-422-8818
EMAIL: WPRECAST@AOL.COM
WEB: WACHUSETTPRECAST.COM

2000 GALLON SEPTIC TANK H-20 SHALLOW

NOT TO SCALE