


PLAN VIEW

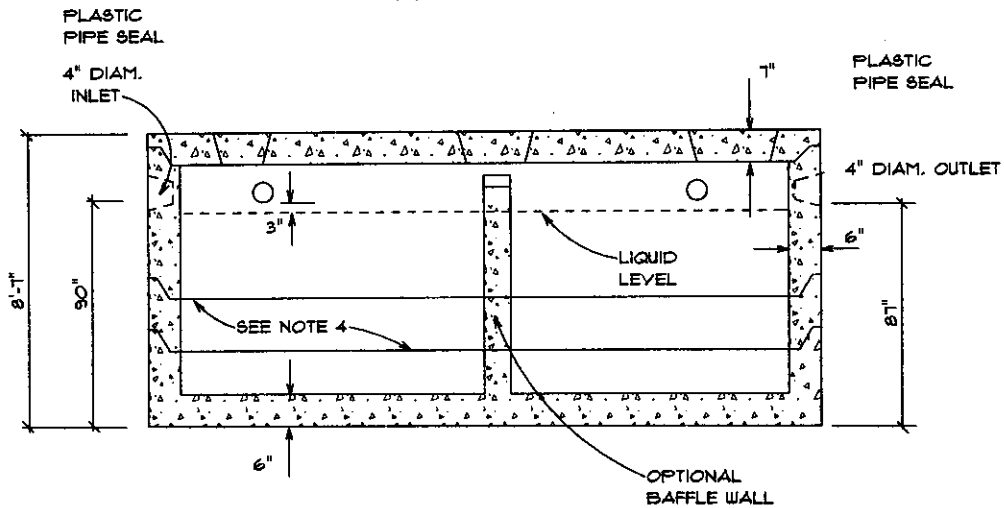

SECTION VIEW

### 3500 GALLON SEPTIC TANK H-20

**SPECIFICATIONS:**

1. TOP 1" THICK WITH #4 REBAR @ 6" O.C. BOTH WAYS
2. BOTTOM 6" WITH #4 REBAR @ 6" O.C. BOTH WAYS
3. WALL 6" THICK WITH 6X6 NO. 10 WELDED WIRE MESH
4. TONGUE AND GROOVE JOINT SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F<sub>c</sub> 4000 PSI @ 28 DAYS
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER.
7. APPROXIMATE WEIGHT 45,000 LBS.
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS.
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5 FT.
10. SPANNERS ARE USED IN RISER SECTIONS FOR ADDED SUPPORT.
11. INLET HEIGHT MAY VARY DUE TO BUTYL RESIN THICKNESS.

## WACHUSETT PRECAST, INC.

74 PRATTS JCT. RD.  
P.O. BOX 901  
STERLING, MA. 01564  
1-800-244-7544

PHONE: 978-422-3311  
FAX: 978-422-8818  
EMAIL: WPRECAST@AOL.COM  
WEB: WACHUSETTPRECAST.COM

3500 GALLON SEPTIC TANK H-20

NOT TO SCALE