


PLAN VIEW

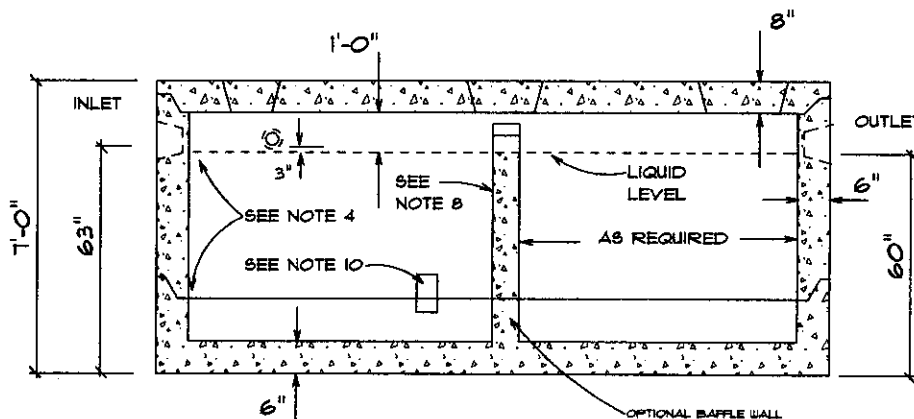

SECTION VIEW

4000 GALLON SEPTIC TANK H-20 SHALLOW

SPECIFICATIONS:

1. TOP 8" THICK & DESIGNED FOR H-20 LOADING
2. BOTTOM 6" THICK AND DESIGNED FOR H-20 LOADING
3. WALL 6" THICK AND DESIGNED FOR H-20 LOADING
4. TONGUE AND GROOVE JOINTS SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F_c 5000 PSI @ 28 DAYS
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER
7. APPROXIMATE WEIGHT 50,000 LBS.
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5 FT.
10. SPANNERS ARE USED IN RISER SECTIONS FOR ADDED SUPPORT.
11. INLET HEIGHT MAY VARY DUE TO BUTYL RESIN THICKNESS.
12. INLET & OUTLET PIPE SIZE AS REQUIRED AND RUBBER BOOTED

WACHUSETT PRECAST, INC.

74 PRATTS JCT. RD.
P.O. BOX 901
STERLING, MA. 01564
1-800-244-1544

PHONE: 978-422-3311
FAX: 978-422-8818
EMAIL: WPRECAST@AOL.COM
WEB: WACHUSETTPRECAST.COM

4000 GALLON SEPTIC TANK H-20

"Shallow"

NOT TO SCALE