


PLAN VIEW

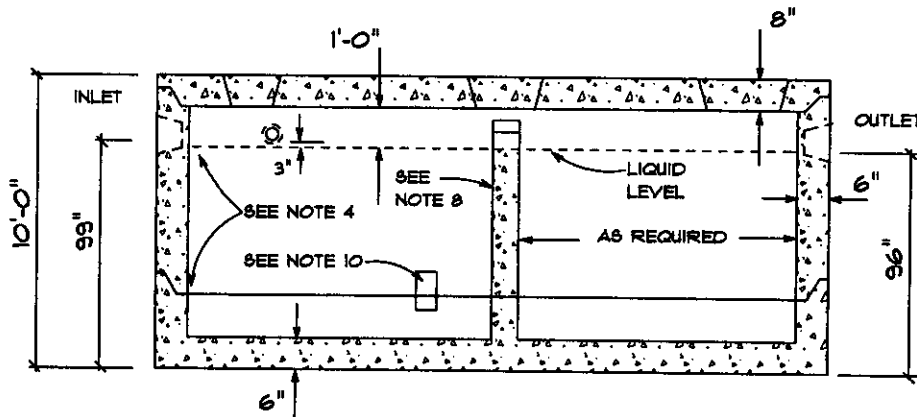

SECTION VIEW

## 1,500 GALLON SEPTIC TANK H-20

**SPECIFICATIONS:**

1. TOP 8" THICK & DESIGNED FOR H-20 LOADING
2. BOTTOM 6" THICK AND DESIGNED FOR H-20 LOADING
3. WALL 6" THICK AND DESIGNED FOR H-20 LOADING
4. TONGUE AND GROOVE JOINTS SEALED WITH BUTYL RESIN.
5. ALL CONCRETE F<sub>c</sub> 5000 PSI @ 28 DAYS
6. ALL REBAR ASTM A615 GRADE 60 OR HIGHER 1" MIN. COVER
7. APPROXIMATE WEIGHT 65,000 LBS.
8. OPTIONAL BAFFLE WALL FOR MULTI COMPARTMENT TANKS
9. MAXIMUM DEPTH OF SOIL COVER ABOVE TANK IS 5 FT.
10. SPANNERS ARE USED IN RISER SECTIONS FOR ADDED SUPPORT.
11. INLET HEIGHT MAY VARY DUE TO BUTYL RESIN THICKNESS.
12. INLET & OUTLET PIPE SIZE AS REQUIRED AND RUBBER BOOTED

## WACHUSETT PRECAST, INC.

74 PRATTS JCT. RD.  
P.O. BOX 901  
STERLING, MA. 01564  
1-800-244-7544

PHONE: 978-422-3311  
FAX: 978-422-8818  
EMAIL: WPRECAST@AOL.COM  
WEB: WACHUSETTPRECAST.COM

1,500 GALLON SEPTIC TANK H-20

NOT TO SCALE